



FR101W THRU FR107W

1.0 AMP Surface Mount Fast Recovery Rectifiers

FEATURES

Glass passivated device
Ideal for surface mounted applications
Low reverse leakage
Metallurgically bonded construction
High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA


Case: SOD-123FL molded plastic body over passivated chip

Terminals: Plated axial leads, solderable per MIL-STD-750,
Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0007 ounce, 0.02 grams

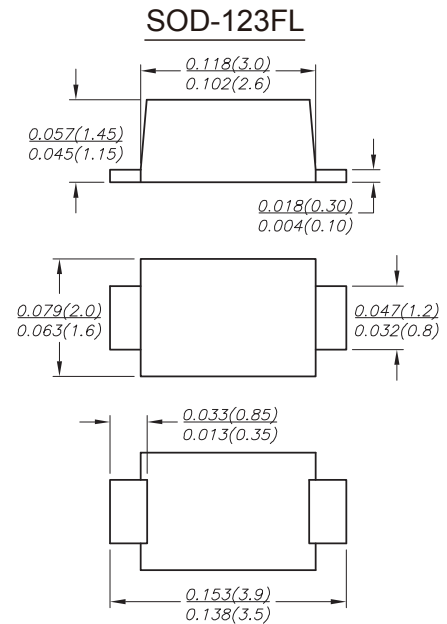

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	FR101W F1	FR102W F2	FR103W F3	FR104W F4	FR105W F5	FR106W F6	FR107W F7	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T _L =90°C	I _(AV)	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	25.0							A
Maximum instantaneous forward voltage at 1.0A	V _F	1.3							V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	5.0 50.0							μA
Maximum reverse recovery time	t _{rr}	150				250	500		ns
Typical junction capacitance	C _J	15							pF
Typical thermal resistance	R _{θJA}	100							°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150							°C

Note: 1. Averaged over any 20ms period.

2. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

3. Measured at 1MHz and applied reverse voltage of 4.0V D.C.





FR101W THRU FR107W

1.0 AMP Surface Mount Fast Recovery Rectifiers

